

PIPISTRELLO-MED



code: **620/MED/DIM/BI**







DESIGN **GAE AULENTI** 1965

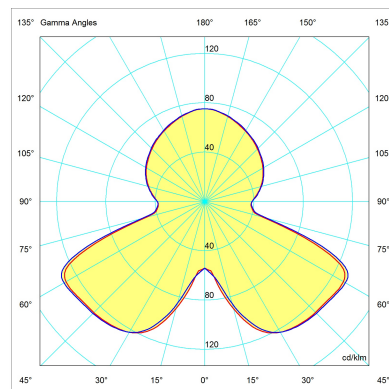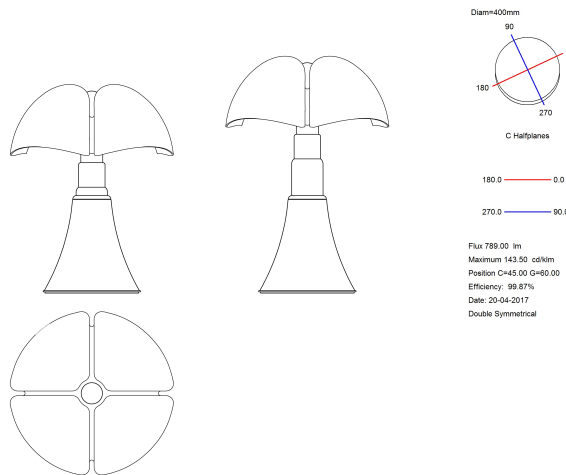

TABLE LAMP, DIFFUSED LIGHT, ADJUSTABLE HEIGHT. GLAZED STAINLESS STEEL TELESCOPE. WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB: DARK BROWN OR WHITE. WITH LED LIGHT SOURCE, DIMMABLE. ELECTRONIC DRIVER ON THE PLUG.

TECHNICAL DRAWINGS



UTILIZATION:	INTERNAL	TIPOLOGY:	TABLE LAMPS	
COLOURS	STRUCTURE: DIFFUSER:	WHITE WHITE		
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE		
MEASURES	WIDTH: - HEIGHT: 50-62 cm LENGTH: - DEPTH: - PACKAGING VOL.M ³ : -	DIAMETER: 40 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: - GROSS: -	NUMBER OF ITEMS: 1
BULBS	LED 1X9W FLUX: 850LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: -			
				
DEVICE SPECIFICATIONS	TYPE OF EMISSION: DIFFUSED POWER: 10 W FLOW LAMP: 787 lm BEAM ANGLE: - DEVICE EFFICIENCY: 78.7lm/W IMPACT RESISTANCE: - GLOW WIRE TEST: -		POWER SUPPLY CABLE LENGTH: 35+200cm LENGTH OF HANGING CABLE: - SUPPLY: INCLUDED POWER SUPPLY ASSEMBLY: EXTERNAL TYPE OF DIMMING: DIMMER ON CABLE VOLTAGE: 230 V	
	POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY			
CERTIFICATIONS	   			
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE			

PIPISTRELLO-MED

code: *620/MED/DIM/BI*

DESIGN **GAE AULENTI** 1965

PHOTO GALLERY

