

MINIPIPISTRELLO



code: **620/J/AU**








DESIGN **GAE AULENTI** 1965

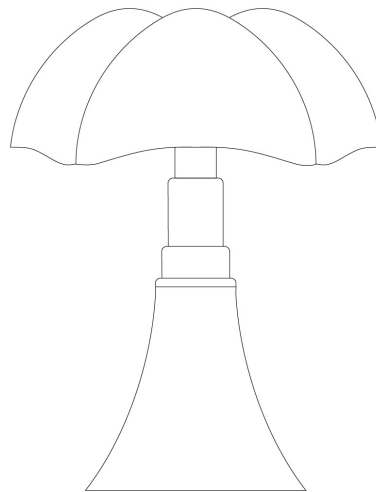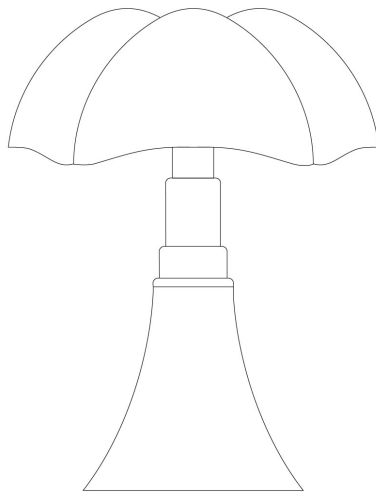

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO, COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS






UTILIZATION: INTERNAL		TPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	GOLDEN WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2.5 GROSS: 4
PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1	
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: -		
			
DEVICE SPECIFICATIONS			
TYPE OF EMISSION: DIFFUSED		POWER SUPPLY CABLE LENGTH: 35+150cm	
POWER: 9 W		LENGTH OF HANGING CABLE: -	
FLOW LAMP: 374 lm		SUPPLY: INCLUDED	
BEAM ANGLE: -		POWER SUPPLY ASSEMBLY: EXTERNAL	
DEVICE EFFICIENCY: 41.6lm/W		TYPE OF DIMMING: -	
IMPACT RESISTANCE: -		VOLTAGE: 230 V	
GLOW WIRE TEST: -			
POWER SUPPLY: ELECTRONIC DRIVER ON THE PLUG			
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA		

MINIPISTRELLO

code: **620/J/AU**


DESIGN **GAE AULENTI** 1965

TECHNICAL DRAWINGS

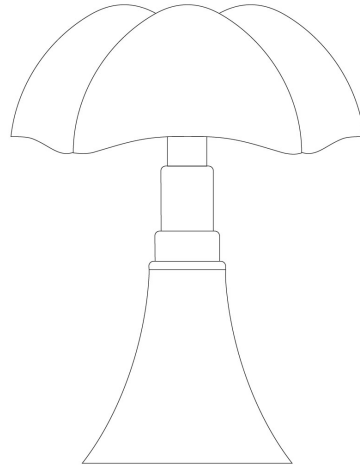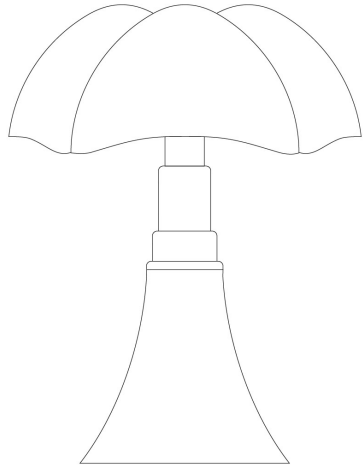

C-Halplanes
180.0 0.0
270.0 90.0

Flux 374.09 lm
Maximum 134.14 cd/klm
Position C=0.00 G=03.00
Efficiency 100.00%
Date 28-08-2015
Double Symmetrical


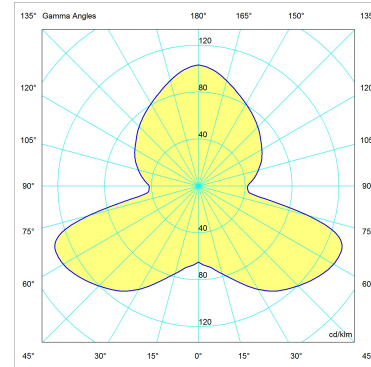


MINIPISTRELLO

code: *620/J/AU*

DESIGN **GAE AULENTI** 1965

PHOTO GALLERY

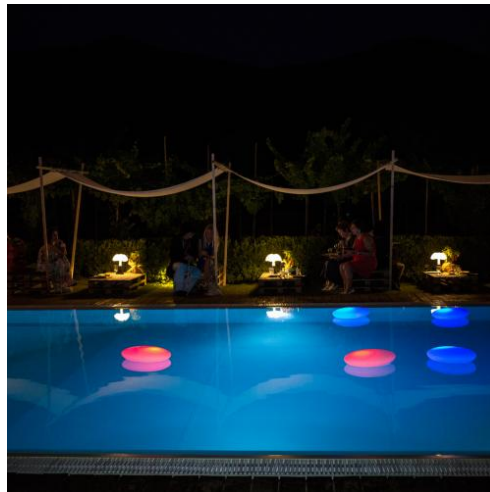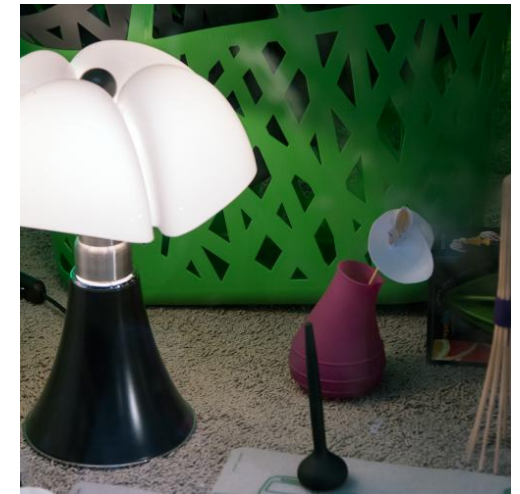

MINIPIPISTRELLO



code: **620/J/BI**








DESIGN **GAE AULENTI** 2013

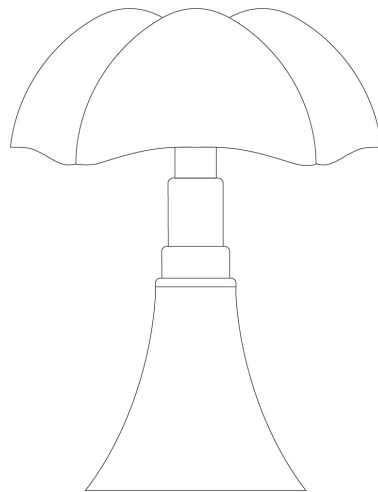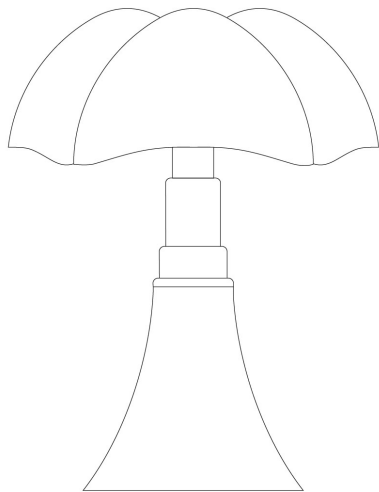

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO. COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS






UTILIZATION: INTERNAL		TPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	WHITE WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2,5 GROSS: 4
	PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: -		
			
DEVICE SPECIFICATIONS			
TYPE OF EMISSION: DIFFUSED		POWER SUPPLY CABLE LENGTH: 35+150cm	
POWER: 9 W		LENGTH OF HANGING CABLE: -	
FLOW LAMP: 374 lm		SUPPLY: INCLUDED	
BEAM ANGLE: -		POWER SUPPLY ASSEMBLY: EXTERNAL	
DEVICE EFFICIENCY: 41.6lm/W		TYPE OF DIMMING: -	
IMPACT RESISTANCE: -		VOLTAGE: 230 V	
GLOW WIRE TEST: -			
POWER SUPPLY: ELECTRONIC DRIVER ON THE PLUG			
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA		

MINIPISTRELLO

code: 620/J/BI


DESIGN **GAE AULENTI** 2013

TECHNICAL DRAWINGS

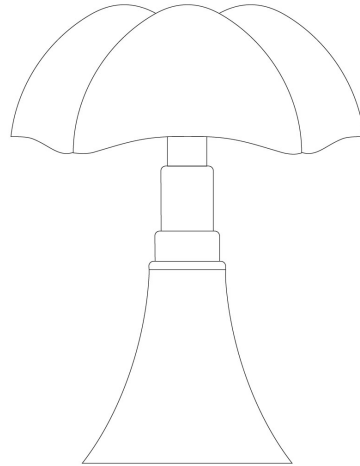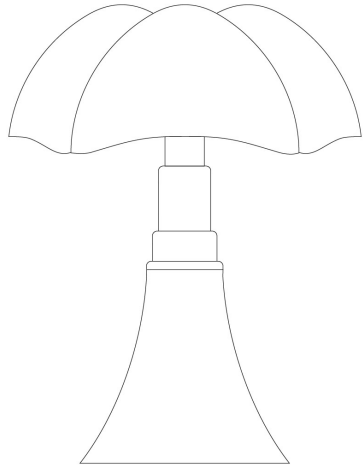

C-Halplanes
180.0 0.0
270.0 90.0

Flux 374.09 lm
Maximum 134.14 cd/klm
Position C=0.00 G=03.00
Efficiency 100.00%
Date 28-08-2015
Double Symmetrical

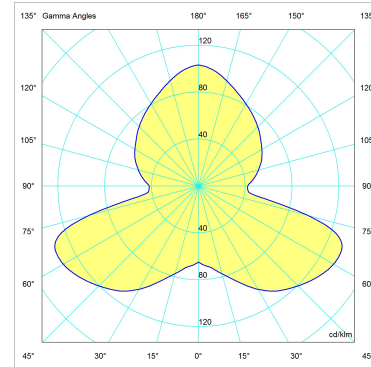


MINIPISTRELLO

code: *620/J/BI*

DESIGN **GAE AULENTI** 2013

PHOTO GALLERY

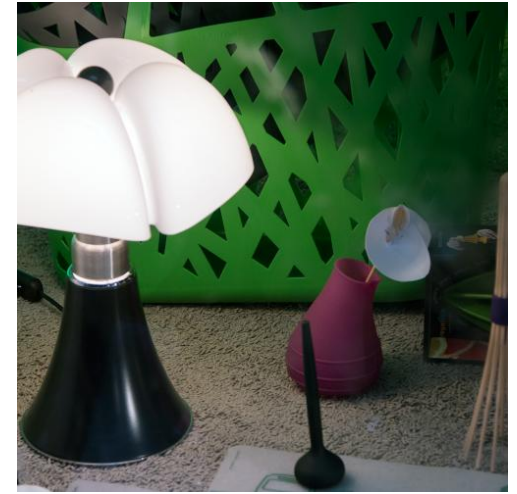

MINIPIPISTRELLO



code: **620/J/CU**

DESIGN **GAE AULENTI** 2013



MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO, COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS

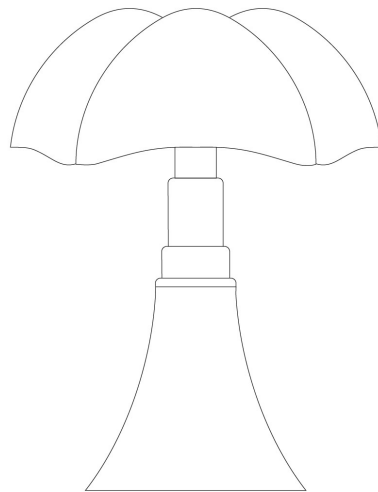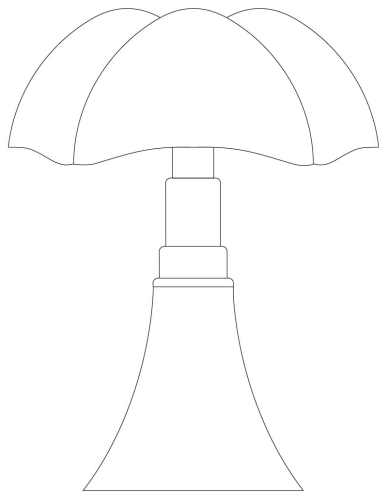

UTILIZATION: INTERNAL

TIPOLOGY: TABLE LAMPS



COLOURS STRUCTURE:
DIFFUSER:

COPPER
WHITE

MATERIALS STRUCTURE:
DIFFUSER:

STAINLESS STEEL
OPAL WHITE METHACRYLATE

MEASURES WIDTH: -
HEIGHT: **35 cm**
LENGTH: -
DEPTH: -

DIAMETER: **27 cm**
HOLE DIAMETER: -
HOLE DEPTH: -

WEIGHT NET: **2.5**
GROSS: **4**

PACKAGING VOL.M³: **0.33X0.33X0.62**

NUMBER OF ITEMS: **1**

BULBS

LED 1X7W
FLUX: 700LM
KELVIN: 2700°
CLASS: A++
CRI: -
COLOR TOLERANCE: -
DURATION: -



DEVICE SPECIFICATIONS

TYPE OF EMISSION: **DIFFUSED**
POWER: **9 W**
FLOW LAMP: **374 lm**
BEAM ANGLE: -
DEVICE EFFICIENCY: **41.6lm/W**
IMPACT RESISTANCE: -
GLOW WIRE TEST: -

POWER SUPPLY CABLE LENGTH: **35+150cm**
LENGTH OF HANGING CABLE: -
SUPPLY: **INCLUDED**
POWER SUPPLY ASSEMBLY: **EXTERNAL**
TYPE OF DIMMING: -
VOLTAGE: **230 V**

POWER SUPPLY: **ELECTRONIC DRIVER ON THE PLUG**

CERTIFICATIONS



MARKETS




THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES:
EUROPE, USA & CANADA

MINIPISTRELLO

code: *620/J/CU*


DESIGN GAE AULENTI 2013

TECHNICAL DRAWINGS

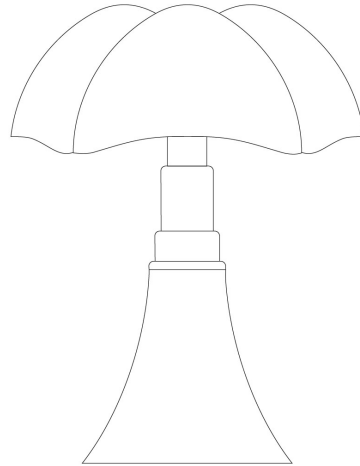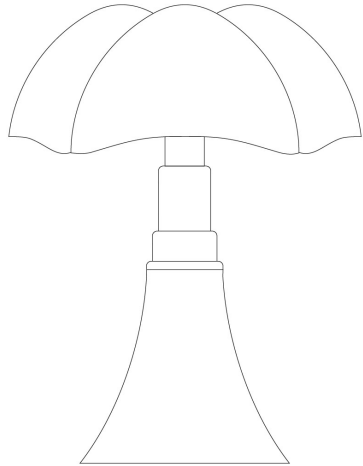

C-Halplanes
180.0 0.0
270.0 90.0

Flux 374.09 lm
Maximum 134.14 cd/klm
Position C=0.00 G=03.00
Efficiency 100.00%
Date 28-08-2015
Double Symmetrical

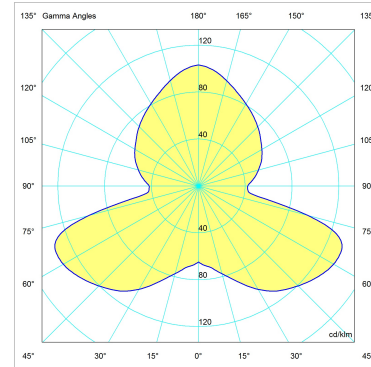


MINIPISTRELLO

code: *620/J/CU*

DESIGN **GAE AULENTI** 2013

PHOTO GALLERY

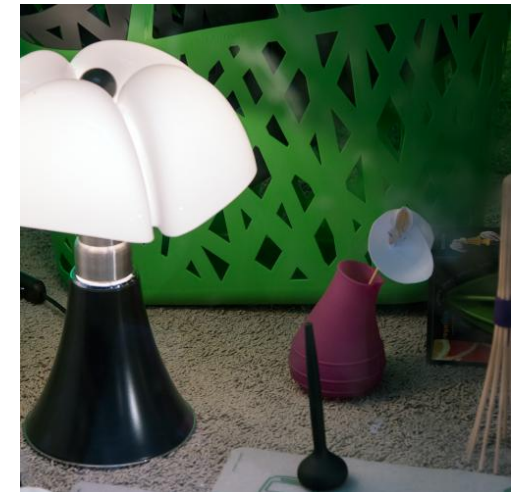

MINIPIPISTRELLO



code: **620/J/DIM/T/AU**








DESIGN **GAE AULENTI** 2016

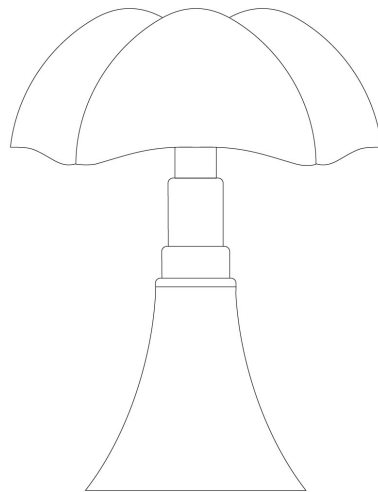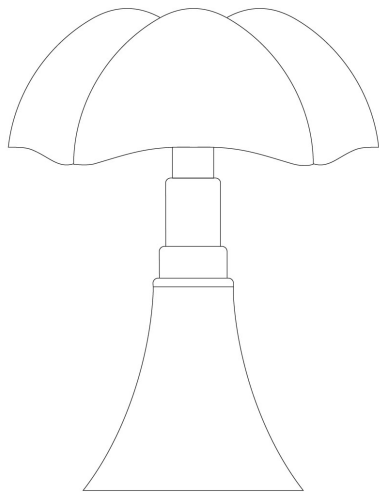

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO, COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS






UTILIZATION: INTERNAL		TPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	GOLDEN WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2.5 GROSS: 4
	PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: - 		
DEVICE SPECIFICATIONS		POWER SUPPLY CABLE LENGTH: 190cm	
TYPE OF EMISSION: DIFFUSED		LENGTH OF HANGING CABLE: -	
POWER: 9 W		SUPPLY: INCLUDED	
FLOW LAMP: 374 lm		POWER SUPPLY ASSEMBLY: EXTERNAL	
BEAM ANGLE: -		TYPE OF DIMMING: TOUCH ON THE BODY	
DEVICE EFFICIENCY: 41.6lm/W		VOLTAGE: 230 V	
IMPACT RESISTANCE: -			
GLOW WIRE TEST: -			
POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY			
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA		

MINIPISTRELLO

code: *620/J/DIM/T/AU*

DESIGN GAE AULENTI 2016

TECHNICAL DRAWINGS

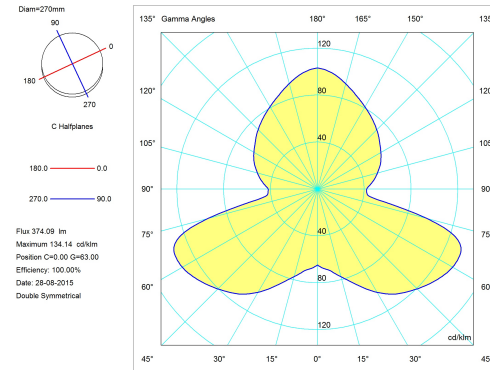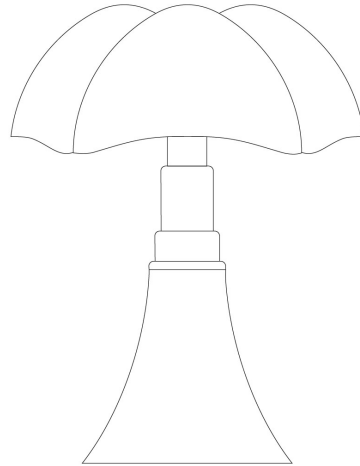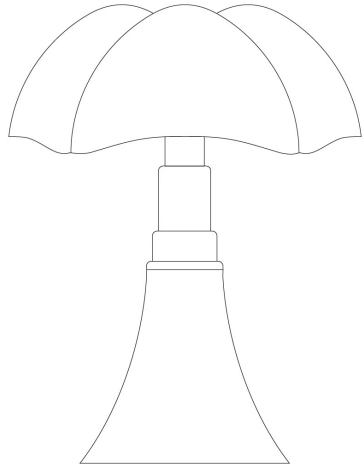


MINIPISTRELLO

code: *620/J/DIM/T/AU*

DESIGN **GAE AULENTI** 2016

PHOTO GALLERY

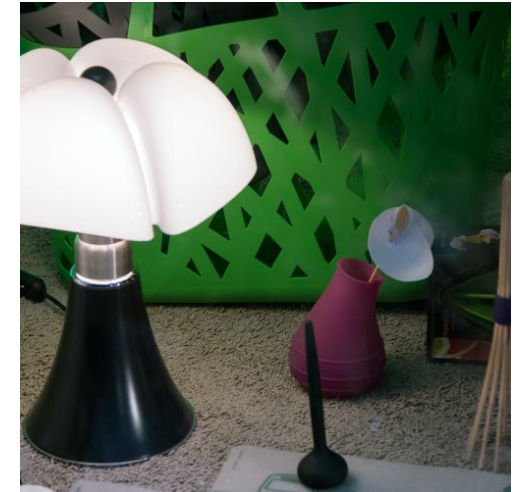

MINIPIPISTRELLO



code: **620/J/DIM/T/BI**








DESIGN **GAE AULENTI** 2013

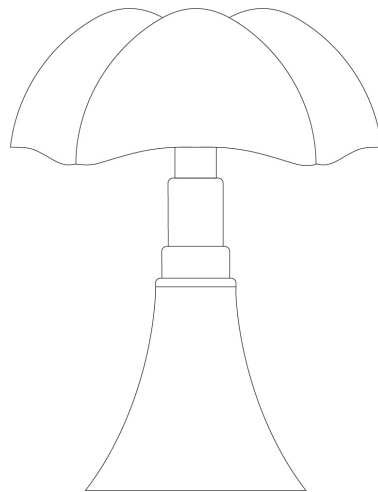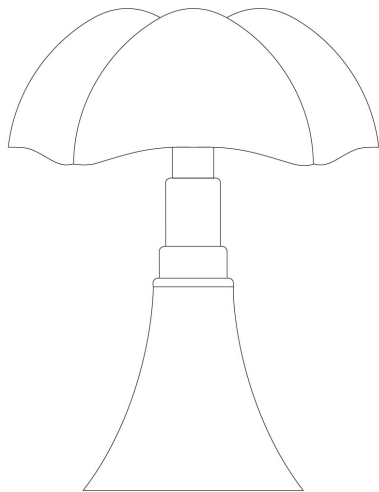

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO. COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS






UTILIZATION: INTERNAL		TPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	WHITE WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2.5 GROSS: 4
	PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: - 		
DEVICE SPECIFICATIONS		POWER SUPPLY CABLE LENGTH: 190cm	
TYPE OF EMISSION: DIFFUSED		LENGTH OF HANGING CABLE: -	
POWER: 9 W		SUPPLY: INCLUDED	
FLOW LAMP: 374 lm		POWER SUPPLY ASSEMBLY: EXTERNAL	
BEAM ANGLE: -		TYPE OF DIMMING: TOUCH ON THE BODY	
DEVICE EFFICIENCY: 41.6lm/W		VOLTAGE: 230 V	
IMPACT RESISTANCE: -			
GLOW WIRE TEST: -			
POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY			
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA		

MINIPISTRELLO


code: *620/J/DIM/T/BI*

DESIGN **GAE AULENTI** 2013

TECHNICAL DRAWINGS

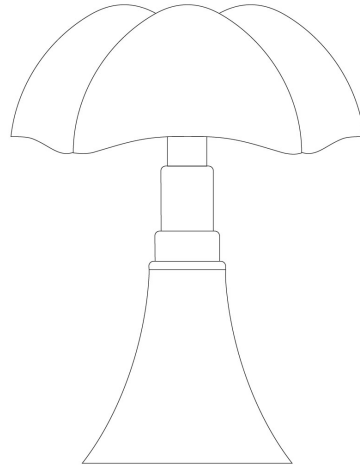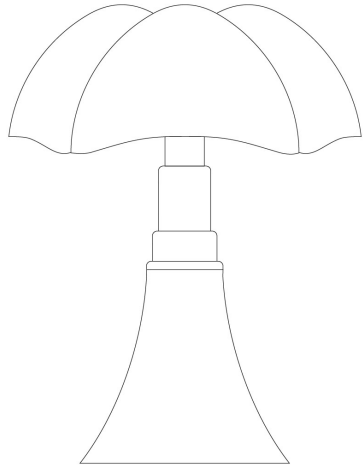

Flux 374.09 lm
Maximum 134.14 cd/klm
Position C=0.00 G=03.00
Efficiency 100.00%
Date 28-08-2015
Double Symmetrical

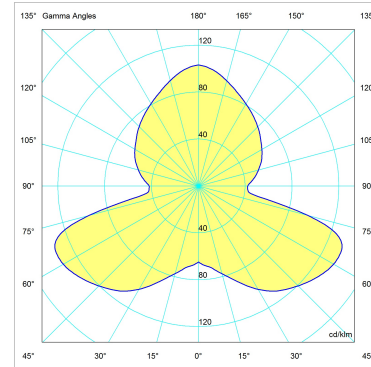


MINIPISTRELLO

code: *620/J/DIM/T/BI*

DESIGN **GAE AULENTI** 2013

PHOTO GALLERY

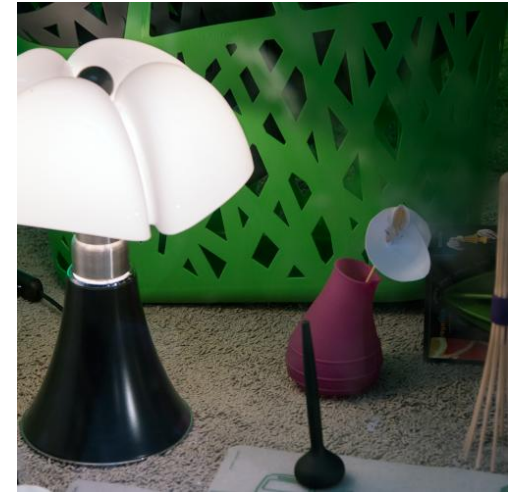

MINIPIPISTRELLO



code: **620/J/DIM/T/CU**








DESIGN **GAE AULENTI** 2013

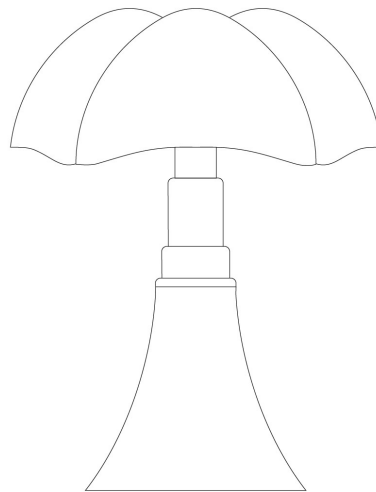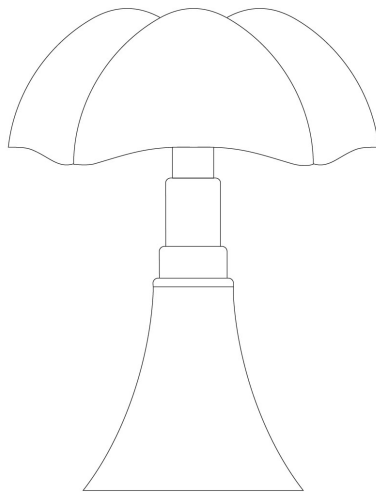

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO, COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS






UTILIZATION: INTERNAL		TIPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	COPPER WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2.5 GROSS: 4
	PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: - 		
DEVICE SPECIFICATIONS		POWER SUPPLY CABLE LENGTH: 190cm	
TYPE OF EMISSION: DIFFUSED		LENGTH OF HANGING CABLE: -	
POWER: 9 W		SUPPLY: INCLUDED	
FLOW LAMP: 374 lm		POWER SUPPLY ASSEMBLY: EXTERNAL	
BEAM ANGLE: -		TYPE OF DIMMING: TOUCH ON THE BODY	
DEVICE EFFICIENCY: 41.6lm/W		VOLTAGE: 230 V	
IMPACT RESISTANCE: -			
GLOW WIRE TEST: -			
POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY			
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA		

MINIPISTRELLO

code: *620/J/DIM/T/CU*

DESIGN **GAE AULENTI** 2013

TECHNICAL DRAWINGS

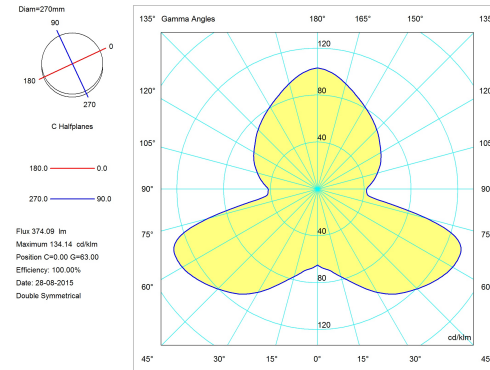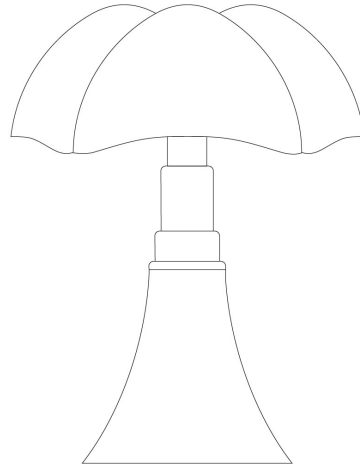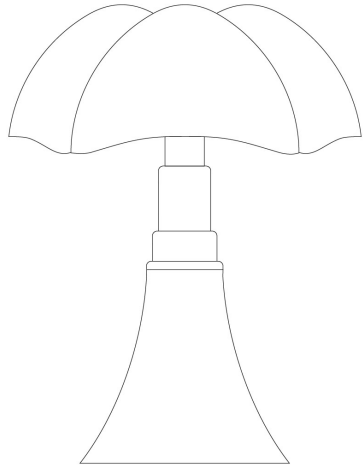


MINIPISTRELLO

code: *620/J/DIM/T/CU*

DESIGN **GAE AULENTI** 2013

PHOTO GALLERY

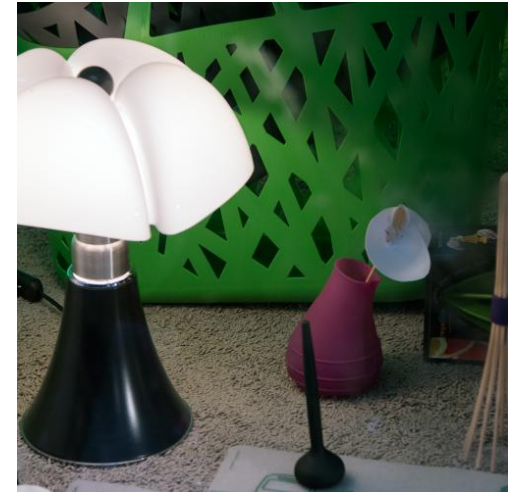

MINIPIPISTRELLO



code: **620/J/DIM/T/MA**








DESIGN **GAE AULENTI** 2013

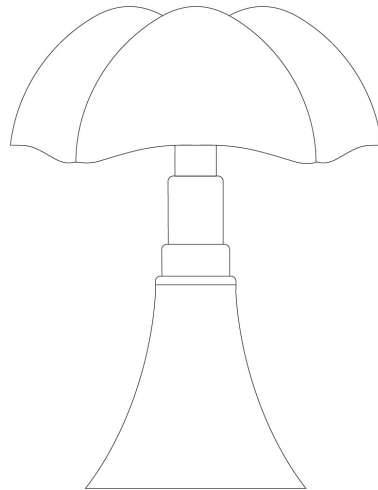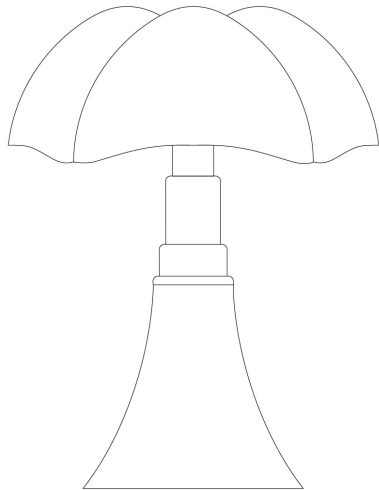

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO, COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS






UTILIZATION: INTERNAL		TPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	DARK BROWN WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2.5 GROSS: 4
PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1	
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: -		
			
DEVICE SPECIFICATIONS			
TYPE OF EMISSION: DIFFUSED		POWER SUPPLY CABLE LENGTH: 190cm	
POWER: 9 W		LENGTH OF HANGING CABLE: -	
FLOW LAMP: 374 lm		SUPPLY: INCLUDED	
BEAM ANGLE: -		POWER SUPPLY ASSEMBLY: EXTERNAL	
DEVICE EFFICIENCY: 41.6lm/W		TYPE OF DIMMING: TOUCH ON THE BODY	
IMPACT RESISTANCE: -		VOLTAGE: 230 V	
GLOW WIRE TEST: -			
POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY			
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA		

MINIPISTRELLO


code: 620/J/DIM/T/MA

DESIGN **GAE AULENTI** 2013

TECHNICAL DRAWINGS

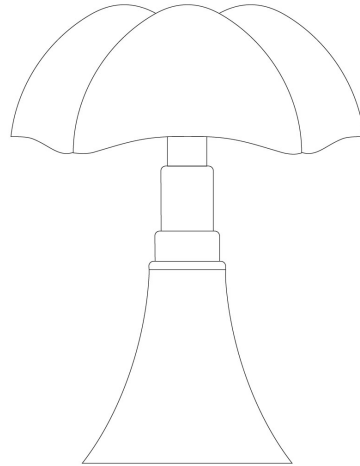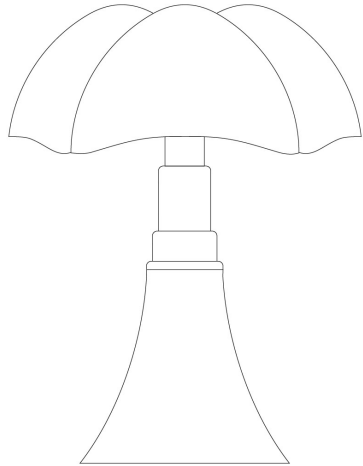

C-Halplanes
180.0 0.0
270.0 90.0
Flux 374.09 lm
Maximum 134.14 cd/klm
Position C=0.00 G=03.00
Efficiency 100.00%
Date 28-08-2015
Double Symmetrical

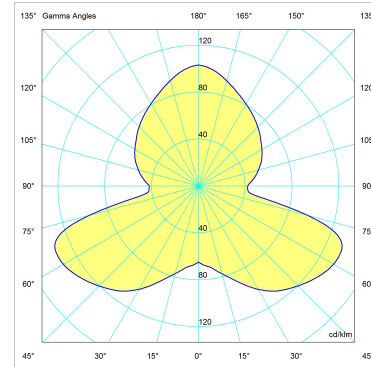


MINIPISTRELLO

code: *620/J/DIM/T/MA*

DESIGN **GAE AULENTI** 2013

PHOTO GALLERY

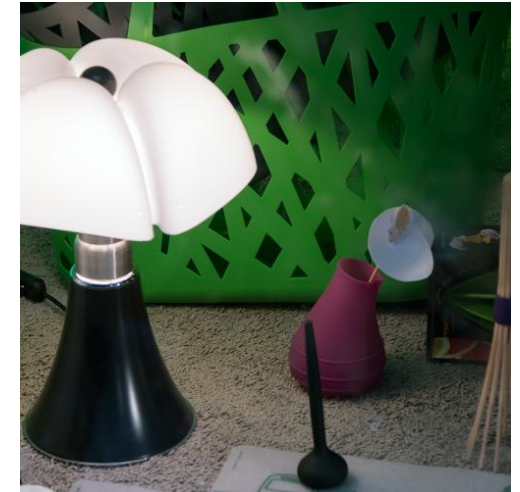

MINIPIPISTRELLO



code: **620/J/DIM/T/RO**








DESIGN **GAE AULENTI** 2016

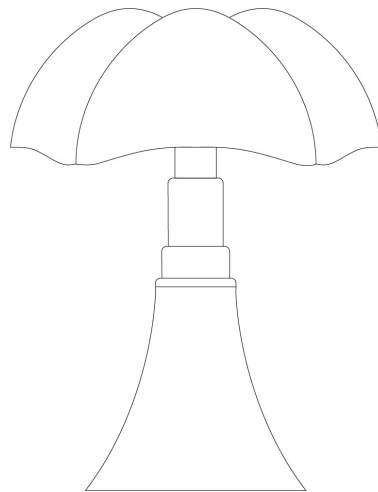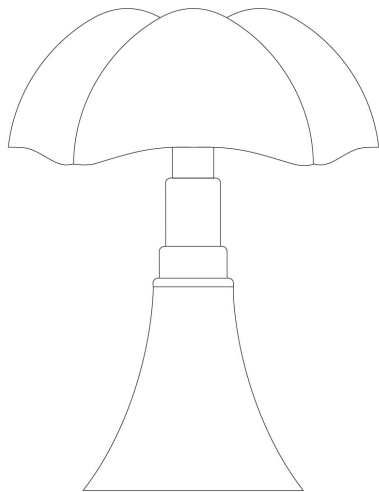

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO, COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS






UTILIZATION: INTERNAL		TPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	PURPLE RED WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2.5 GROSS: 4
PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1	
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: -		
			
DEVICE SPECIFICATIONS			
TYPE OF EMISSION: DIFFUSED		POWER SUPPLY CABLE LENGTH: 190cm	
POWER: 9 W		LENGTH OF HANGING CABLE: -	
FLOW LAMP: 374 lm		SUPPLY: INCLUDED	
BEAM ANGLE: -		POWER SUPPLY ASSEMBLY: EXTERNAL	
DEVICE EFFICIENCY: 41.6lm/W		TYPE OF DIMMING: TOUCH ON THE BODY	
IMPACT RESISTANCE: -		VOLTAGE: 230 V	
GLOW WIRE TEST: -			
POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY			
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA		

MINIPISTRELLO


code: *620/J/DIM/T/RO*

DESIGN **GAE AULENTI** 2016

TECHNICAL DRAWINGS

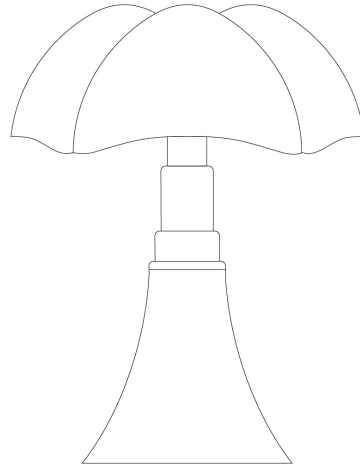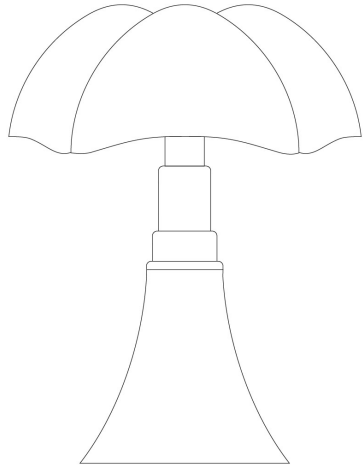

Diam=270mm
C-Halplanes
180.0 0.0
270.0 90.0
Flux 374.09 lm
Maximum 134.14 cd/klm
Position C=0.00 G=03.00
Efficiency 100.00%
Date 28-08-2015
Double Symmetrical

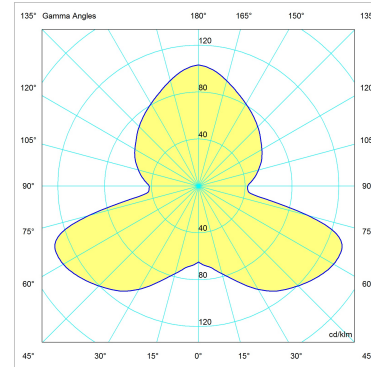


MINIPISTRELLO

code: *620/J/DIM/T/RO*

DESIGN **GAE AULENTI** 2016

PHOTO GALLERY

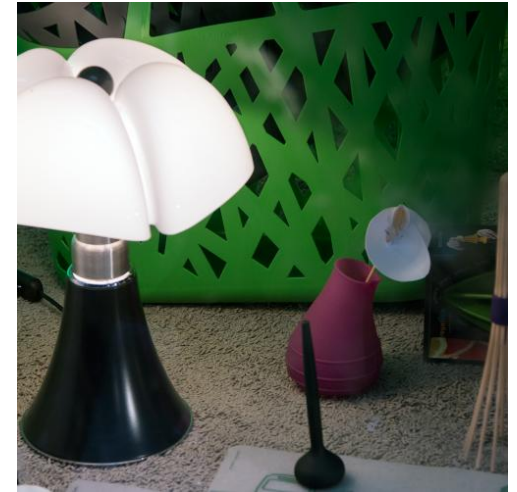

MINIPIPISTRELLO



code: **620/J/DIM/T/TI**








DESIGN **GAE AULENTI** 2013

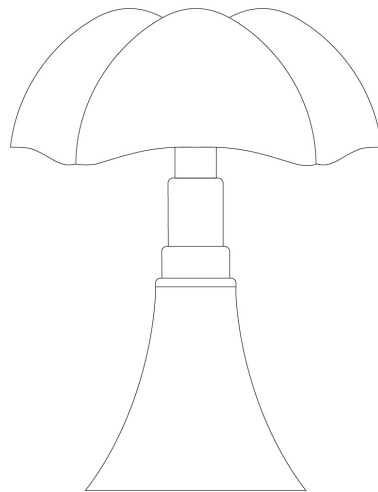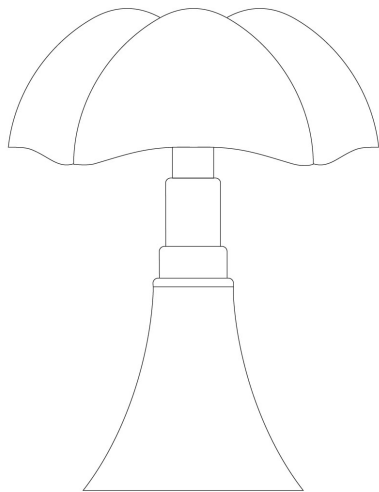

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO, COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS






UTILIZATION: INTERNAL		TIPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	TITANIUM WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2.5 GROSS: 4
	PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: - 		
DEVICE SPECIFICATIONS		POWER SUPPLY CABLE LENGTH: 190cm	
TYPE OF EMISSION: DIFFUSED		LENGTH OF HANGING CABLE: -	
POWER: 9 W		SUPPLY: INCLUDED	
FLOW LAMP: 374 lm		POWER SUPPLY ASSEMBLY: EXTERNAL	
BEAM ANGLE: -		TYPE OF DIMMING: TOUCH ON THE BODY	
DEVICE EFFICIENCY: 41.6lm/W		VOLTAGE: 230 V	
IMPACT RESISTANCE: -			
GLOW WIRE TEST: -			
POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY			
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA		

MINIPISTRELLO

code: 620/J/DIM/T/TI


DESIGN **GAE AULENTI** 2013

TECHNICAL DRAWINGS

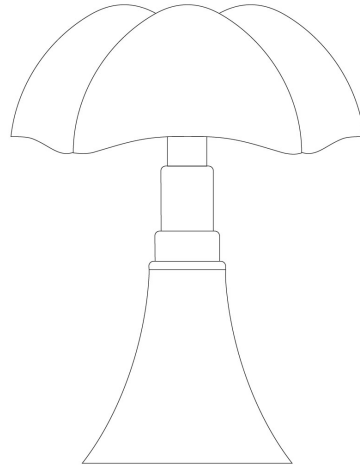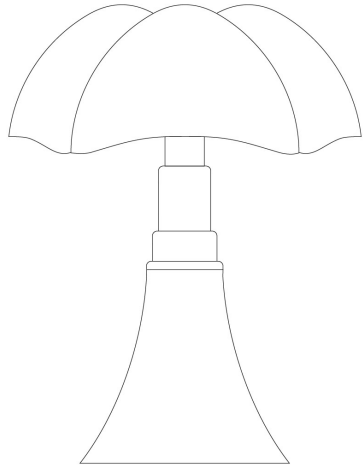

C-Halplanes
180.0 0.0
270.0 90.0

Flux 374.09 lm
Maximum 134.14 cd/klm
Position C=0.00 G=03.00
Efficiency 100.00%
Date 28-08-2015
Double Symmetrical


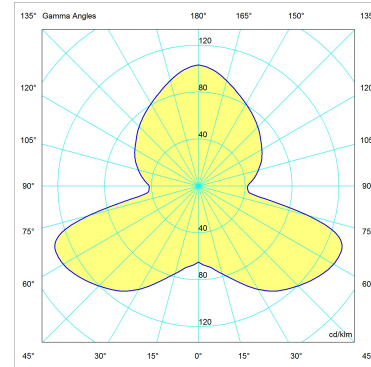


MINIPISTRELLO

code: *620/J/DIM/T/TI*

DESIGN **GAE AULENTI** 2013

PHOTO GALLERY

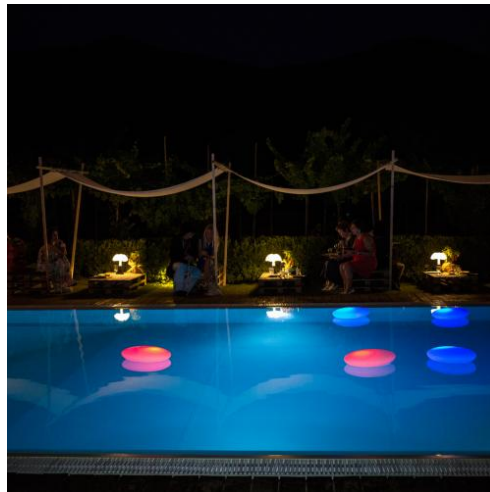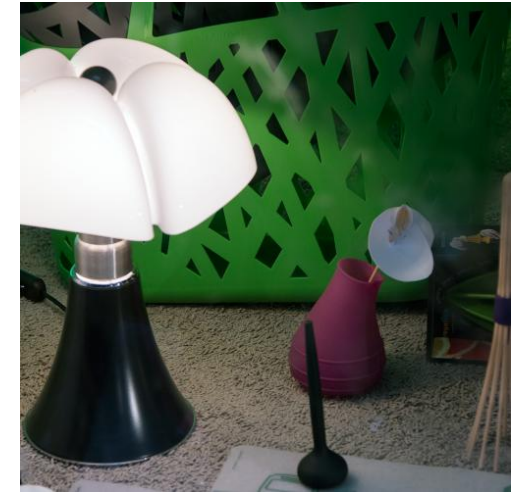

MINIPIPISTRELLO



code: **620/J/MA**








DESIGN **GAE AULENTI** 2013

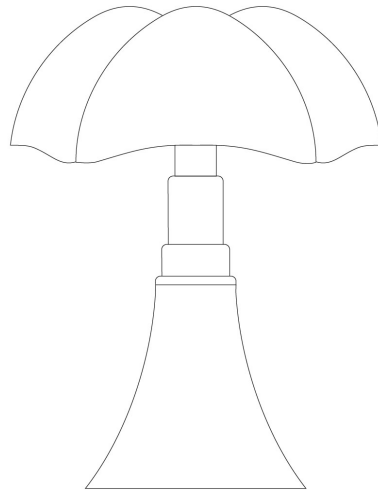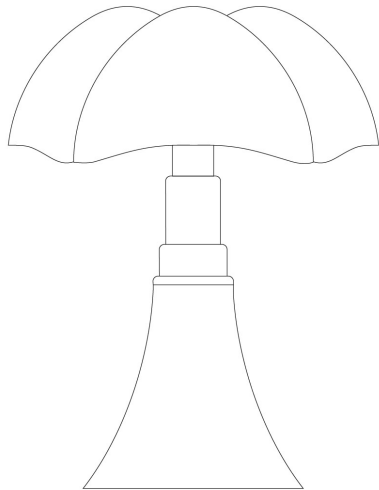

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO, COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS






UTILIZATION: INTERNAL		TPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	DARK BROWN WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2.5 GROSS: 4
PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1	
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: -		
			
DEVICE SPECIFICATIONS			
TYPE OF EMISSION: DIFFUSED		POWER SUPPLY CABLE LENGTH: 35+150cm	
POWER: 9 W		LENGTH OF HANGING CABLE: -	
FLOW LAMP: 374 lm		SUPPLY: INCLUDED	
BEAM ANGLE: -		POWER SUPPLY ASSEMBLY: EXTERNAL	
DEVICE EFFICIENCY: 41.6lm/W		TYPE OF DIMMING: -	
IMPACT RESISTANCE: -		VOLTAGE: 230 V	
GLOW WIRE TEST: -			
POWER SUPPLY: ELECTRONIC DRIVER ON THE PLUG			
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA		

MINIPISTRELLO

code: **620/J/MA**


DESIGN **GAE AULENTI** 2013

TECHNICAL DRAWINGS

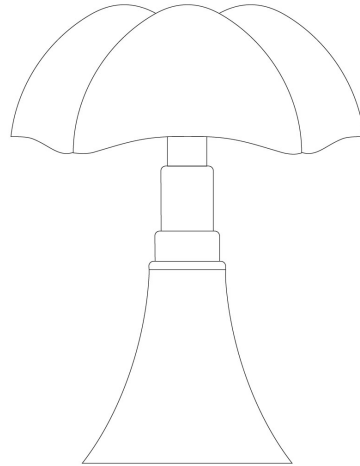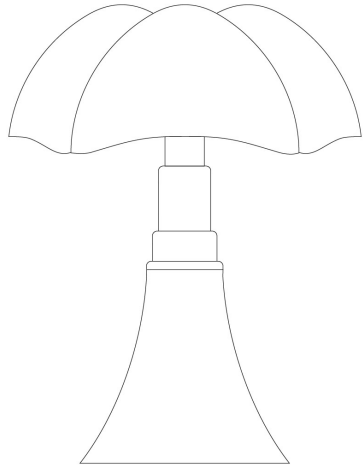

C-Halplanes
180.0 0.0
270.0 90.0

Flux 374.09 lm
Maximum 134.14 cd/klm
Position C=0.00 G=03.00
Efficiency 100.00%
Date 28-08-2015
Double Symmetrical

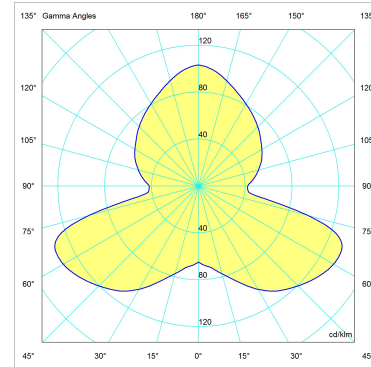


MINIPISTRELLO

code: **620/J/MA**

DESIGN **GAE AULENTI** 2013

PHOTO GALLERY

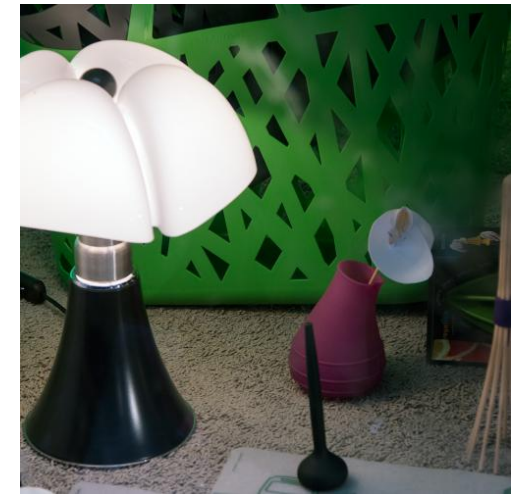

MINIPIPISTRELLO



code: **620/J/RO**








DESIGN **GAE AULENTI** 2016

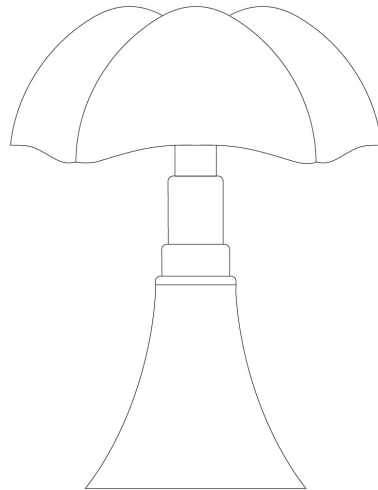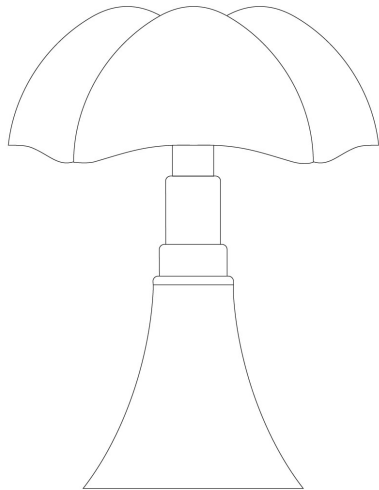

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO, COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS






UTILIZATION: INTERNAL		TPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	PURPLE RED WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2.5 GROSS: 4
PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1	
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: -		
			
DEVICE SPECIFICATIONS			
TYPE OF EMISSION: DIFFUSED		POWER SUPPLY CABLE LENGTH: 35+150cm	
POWER: 9 W		LENGTH OF HANGING CABLE: -	
FLOW LAMP: 374 lm		SUPPLY: INCLUDED	
BEAM ANGLE: -		POWER SUPPLY ASSEMBLY: EXTERNAL	
DEVICE EFFICIENCY: 41.6lm/W		TYPE OF DIMMING: -	
IMPACT RESISTANCE: -		VOLTAGE: 230 V	
GLOW WIRE TEST: -			
POWER SUPPLY: ELECTRONIC DRIVER ON THE PLUG			
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA		

MINIPISTRELLO

code: 620/J/RO

DESIGN **GAE AULENTI** 2016



TECHNICAL DRAWINGS

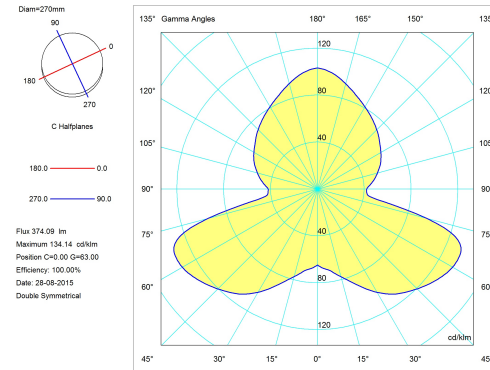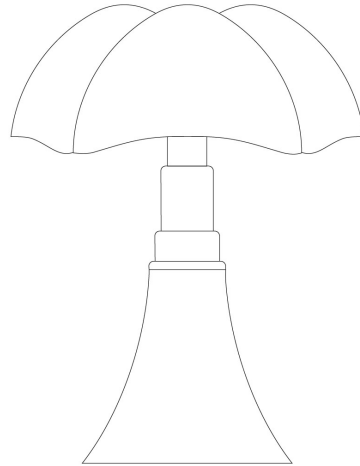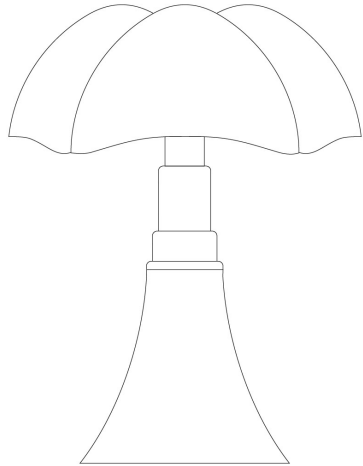

MINIPISTRELLO code: *620/J/RO*

DESIGN **GAE AULENTI** 2016

PHOTO GALLERY

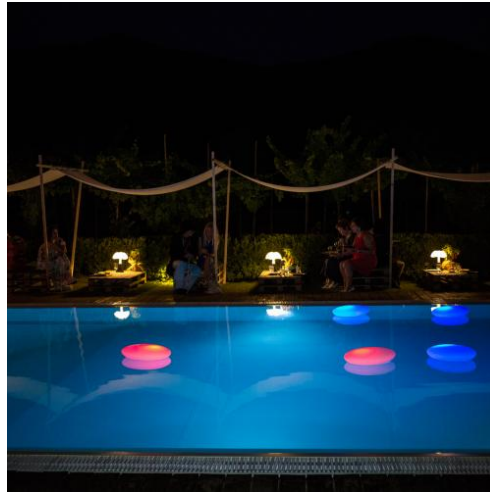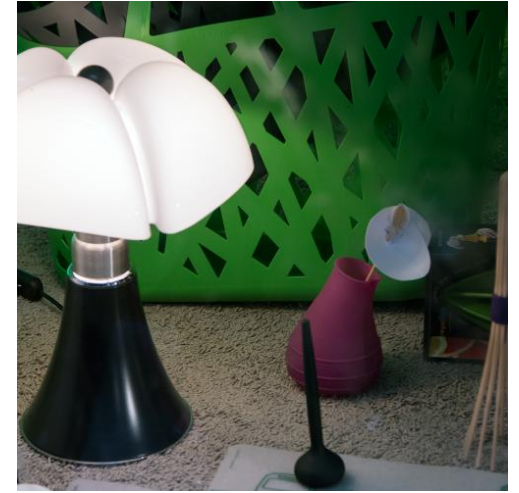

MINIPIPISTRELLO



code: **620/J/TI**








DESIGN **GAE AULENTI** 2013

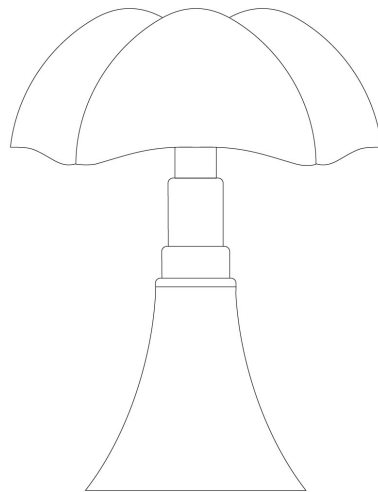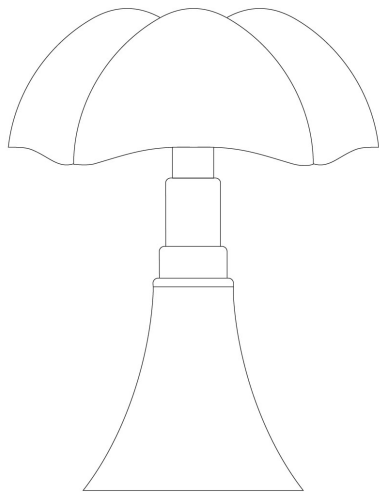

MINI VERSION OF THE PIPISTRELLO LAMP DESIGNED BY GAE AULENTI IN 1965. TABLE LAMP DIFFUSED LIGHTING, LED LIGHT SOURCE. GLAZED STAINLESS STEEL STRUCTURE, WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB LACQUERED ALUMINIUM IN WHITE /J/BI, DARK BROWN /J/MA, PURPLE RED /J/RO, COPPER /J/CU, GOLDEN /J/AU AND IN COLOR TITANIUM /J/TI. ELECTRONIC DRIVER ON THE PLUG. AVAILABLE ALSO WITH DIMMABLE (CODE 620/J/DIM/T) AND TOUCH SENSOR ON/OFF.

TECHNICAL DRAWINGS




UTILIZATION: INTERNAL		TIPOLOGY: TABLE LAMPS 	
COLOURS	STRUCTURE: DIFFUSER:	TITANIUM WHITE	
MATERIALS	STRUCTURE: DIFFUSER:	STAINLESS STEEL OPAL WHITE METHACRYLATE	
MEASURES	WIDTH: - HEIGHT: 35 cm LENGTH: - DEPTH: -	DIAMETER: 27 cm HOLE DIAMETER: - HOLE DEPTH: -	WEIGHT NET: 2.5 GROSS: 4
	PACKAGING VOL.M ³ : 0.33X0.33X0.62		NUMBER OF ITEMS: 1
BULBS	LED 1X7W FLUX: 700LM KELVIN: 2700° CLASS: A++ CRI: - COLOR TOLERANCE: - DURATION: -		
			
DEVICE SPECIFICATIONS			
TYPE OF EMISSION: DIFFUSED		POWER SUPPLY CABLE LENGTH: 35+150cm	
POWER: 9 W		LENGTH OF HANGING CABLE: -	
FLOW LAMP: 374 lm		SUPPLY: INCLUDED	
BEAM ANGLE: -		POWER SUPPLY ASSEMBLY: EXTERNAL	
DEVICE EFFICIENCY: 41.6lm/W		TYPE OF DIMMING: -	
IMPACT RESISTANCE: -		VOLTAGE: 230 V	
GLOW WIRE TEST: -			
POWER SUPPLY: ELECTRONIC DRIVER ON THE PLUG			
CERTIFICATIONS	    		
MARKETS	THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES: EUROPE, USA & CANADA		

MINIPISTRELLO

code: **620/J/TI**

DESIGN GAE AULENTI 2013

TECHNICAL DRAWINGS

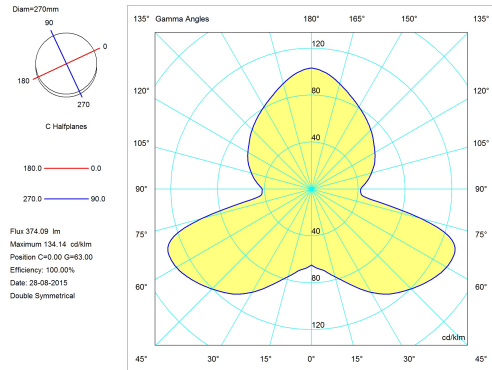

MINIPISTRELLO

code: *620/J/TI*

DESIGN **GAE AULENTI** 2013

PHOTO GALLERY

