



The Tracking Magnet Surface/Suspension Profile 90° Mechanical Corner

The Tracking Magnet Surface/Suspension Profile 90° Mechanical Corner

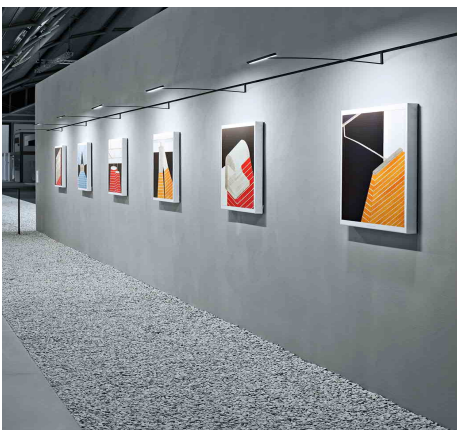

Mountings	Surface and suspension
Voltage (V)	48
Environment	Indoor
Emergency	Without
Spot Diameter	-1
Length	55
Colors	<ul style="list-style-type: none"> 06.5015.05 - Polished Aluminium 06.5015.14 - Black 06.5015.40 - White

Certificates




Note

90° mechanical corner. To create electrical continuity, order with the flexible intermediate connector.

The Tracking Magnet Surface/Suspension Profile 90° Mechanical Corner



The Tracking Magnet
Surface/Suspension Profile
End Caps
06.5017.14



Surface rose
08.8883.14A




Suspension rod with 1m rose.
M6 thread
60.3014.11



Suspension rod with 1m rose.
M6 thread
60.3014.14



Recessed power supply rose
08.8889.14



Surface rose
08.8883.40A



Recessed power supply rose
08.8889.40



The Tracking Magnet Profile
Intermediate Connector
Flexible/Electrical Corner
08.0614.14



Ceiling fixing kit
08.0616.00




1 m suspension rod with
ceiling rose with m6 thread
60.3097.14




Ceiling fixing kit
08.0615.00



1 m suspension rod with
ceiling rose with m6 thread
60.3097.11



4-pole, 0.75 mm² section,
4-meter long, transparent
power cable
06.0157.00

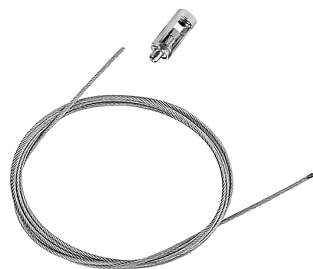

4m suspension steel cable
08.8634.00