

PIPISTRELLO LED



code: **620/DIM/L/1/AL**

DESIGN **GAE AULENTI** 1965



TABLE OR STANDING LAMP WITH DIFFUSED LIGHT, ADJUSTABLE HEIGHT WITH TELESCOPIC MOVEMENT. GLAZED STAINLESS STEEL TELESCOPE. WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB: DARK BROWN /MA, WHITE /BI, PURPLE RED /RO, SATIN ALUMINIUM /AL, BRIGHT BLACK /NE - COPPER /CU, GOLD /ORO AND IN TITANIUM /TI COLOURS. LED LIGHT SOURCE INTEGRATED. ELECTRONIC DIMMABLE DRIVER ON THE PLUG.

TECHNICAL DRAWINGS

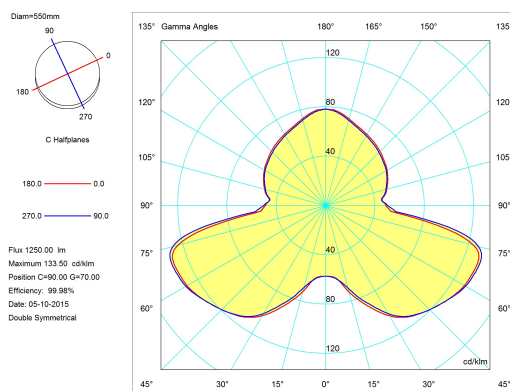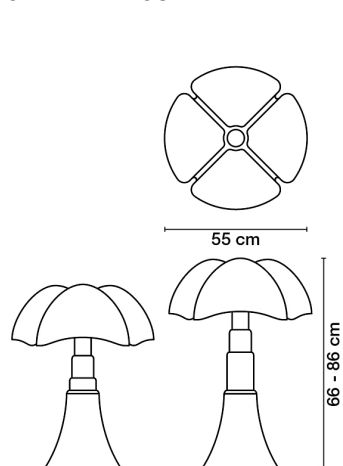

UTILIZATION: **INTERNAL**

TPOLOGY: **TABLE LAMPS**



COLOURS

STRUCTURE:
DIFFUSER:

**SATIN ALUMINIUM
WHITE**

MATERIALS

STRUCTURE:
DIFFUSER:

**STAINLESS STEEL
OPAL WHITE METHACRYLATE**

MEASURES

WIDTH: -
HEIGHT: **66 - 86 cm**
LENGTH: -
DEPTH: -

DIAMETER: **55 cm**
HOLE DIAMETER: -
HOLE DEPTH: -

WEIGHT NET: **10 KG**
GROSS: **14 KG**

PACKAGING VOL.M³: **54X54X26 - 41X41X78**

NUMBER OF ITEMS: **2**

BULBS

LED 1X14W
FLUX: 1400LM
KELVIN: 2700°
CLASS: A++
CRI: -
COLOR TOLERANCE: -
DURATION: -



DEVICE SPECIFICATIONS

TYPE OF EMISSION: **DIFFUSED**
POWER: **14 W**
FLOW LAMP: **1249 lm**
BEAM ANGLE: -
DEVICE EFFICIENCY: **89.2lm/W**
IMPACT RESISTANCE: -
GLOW WIRE TEST: -

POWER SUPPLY CABLE LENGTH: **45+200cm**
LENGTH OF HANGING CABLE: -
SUPPLY: **INCLUDED**
POWER SUPPLY ASSEMBLY: **EXTERNAL**
TYPE OF DIMMING: **DIMMER ON CABLE**
VOLTAGE: **230 V**

POWER SUPPLY: **ELECTRONIC DIMMABLE POWER SUPPLY**

CERTIFICATIONS



MARKETS

THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES:
EUROPE, USA & CANADA

PIPISTRELLO LED

code: *620/DIM/L/1/AL*

DESIGN **GAE AULENTI** 1965

PHOTO GALLERY






PIPISTRELLO LED
code: 620/DIM/L/1/BI

DESIGN GAE AULENTI 1965



TABLE OR STANDING LAMP WITH
DIFFUSED LIGHT, ADJUSTABLE
HEIGHT WITH TELESCOPIC
MOVEMENT. GLAZED STAINLESS
STEEL TELESCOPE. WHITE OPAL
METHACRYLATE DIFFUSER. BASE AND
KNOB: DARK BROWN /MA, WHITE /BI,
PURPLE RED /RO, SATIN ALUMINIUM
/AL, BRIGHT BLACK /NE - COPPER
/CU, GOLD /ORO AND IN TITANIUM /TI
COLOURS. LED LIGHT SOURCE
INTEGRATED. ELECTRONIC DIMMABLE
DRIVER ON THE PLUG.

TECHNICAL DRAWINGS

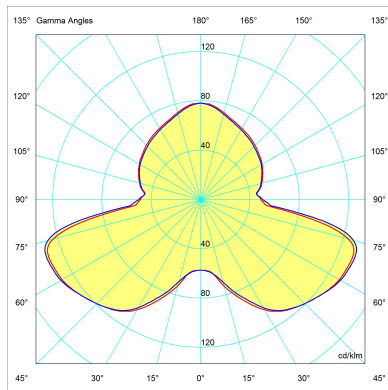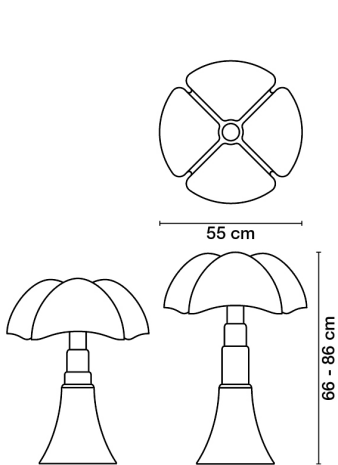

UTILIZATION: INTERNAL

TPOLOGY: TABLE LAMPS



COLOURS

STRUCTURE:
DIFFUSER:

WHITE
WHITE

MATERIALS

STRUCTURE:
DIFFUSER:

STAINLESS STEEL
OPAL WHITE METHACRYLATE

MEASURES

WIDTH: -
HEIGHT: 66 - 86 cm
LENGTH: -
DEPTH: -

DIAMETER: 55 cm
HOLE DIAMETER: -
HOLE DEPTH: -

WEIGHT NET: 10 KG
GROSS: 14 KG

PACKAGING VOL.M³: 54X54X26 - 41X41X78

NUMBER OF ITEMS: 2

BULBS

LED 1X14W
FLUX: 1400LM
KELVIN: 2700°
CLASS: A++
CRI: -
COLOR TOLERANCE: -
DURATION: -



DEVICE SPECIFICATIONS

TYPE OF EMISSION: DIFFUSED
POWER: 14 W
FLOW LAMP: 1249 lm
BEAM ANGLE: -
DEVICE EFFICIENCY: 89.2lm/W
IMPACT RESISTANCE: -
GLOW WIRE TEST: -

POWER SUPPLY CABLE LENGTH: 45+200cm
LENGTH OF HANGING CABLE: -
SUPPLY: INCLUDED
POWER SUPPLY ASSEMBLY: EXTERNAL
TYPE OF DIMMING: DIMMER ON CABLE
VOLTAGE: 230 V

POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY

CERTIFICATIONS



MARKETS

THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES:
EUROPE, USA & CANADA

PIPISTRELLO LED

code: *620/DIM/L/1/BI*

DESIGN **GAE AULENTI** 1965

PHOTO GALLERY



PIPISTRELLO LED
code: 620/DIM/L/1/CU

DESIGN GAE AULENTI 1965



TABLE OR STANDING LAMP WITH
DIFFUSED LIGHT, ADJUSTABLE
HEIGHT WITH TELESCOPIC
MOVEMENT. GLAZED STAINLESS
STEEL TELESCOPE. WHITE OPAL
METHACRYLATE DIFFUSER. BASE AND
KNOB: DARK BROWN /MA, WHITE /BI,
PURPLE RED /RO, SATIN ALUMINIUM
/AL, BRIGHT BLACK /NE - COPPER
/CU, GOLD /ORO AND IN TITANIUM /TI
COLOURS. LED LIGHT SOURCE
INTEGRATED. ELECTRONIC DIMMABLE
DRIVER ON THE PLUG.

UTILIZATION: INTERNAL

TYPOLOGY: TABLE LAMPS



COLOURS

STRUCTURE:
DIFFUSER:

COPPER
WHITE

MATERIALS

STRUCTURE:
DIFFUSER:

STAINLESS STEEL
OPAL WHITE METHACRYLATE

MEASURES

WIDTH: -
HEIGHT: 66 - 86 cm
LENGTH: -
DEPTH: -

DIAMETER: 55 cm
HOLE DIAMETER: -
HOLE DEPTH: -

WEIGHT NET: 10 KG
GROSS: 14 KG

PACKAGING VOL.M³: 54X54X26 - 41X41X78

NUMBER OF ITEMS: 2

BULBS

LED 1X14W
FLUX: 1400LM
KELVIN: 2700°
CLASS: A++
CRI: -
COLOR TOLERANCE: -
DURATION: -



DEVICE SPECIFICATIONS

TYPE OF EMISSION: DIFFUSED
POWER: 14 W
FLOW LAMP: 1249 lm
BEAM ANGLE: -
DEVICE EFFICIENCY: 89.2lm/W
IMPACT RESISTANCE: -
GLOW WIRE TEST: -

POWER SUPPLY CABLE LENGTH: 45+200cm
LENGTH OF HANGING CABLE: -
SUPPLY: INCLUDED
POWER SUPPLY ASSEMBLY: EXTERNAL
TYPE OF DIMMING: DIMMER ON CABLE
VOLTAGE: 230 V

POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY




CERTIFICATIONS



MARKETS

THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES:
EUROPE, USA & CANADA

TECHNICAL DRAWINGS

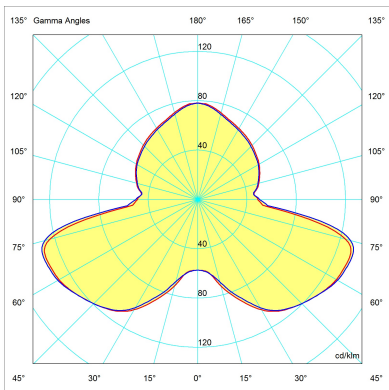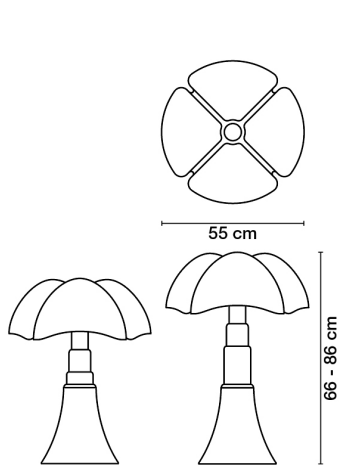

PIPISTRELLO LED

code: *620/DIM/L/1/CU*

DESIGN **GAE AULENTI** 1965

PHOTO GALLERY



PIPISTRELLO LED



code: **620/DIM/L/1/MA**

DESIGN **GAE AULENTI** 1965



TABLE OR STANDING LAMP WITH DIFFUSED LIGHT, ADJUSTABLE HEIGHT WITH TELESCOPIC MOVEMENT. GLAZED STAINLESS STEEL TELESCOPE. WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB: DARK BROWN /MA, WHITE /BI, PURPLE RED /RO, SATIN ALUMINIUM /AL, BRIGHT BLACK /NE - COPPER /CU, GOLD /ORO AND IN TITANIUM /TI COLOURS. LED LIGHT SOURCE INTEGRATED. ELECTRONIC DIMMABLE DRIVER ON THE PLUG.

TECHNICAL DRAWINGS

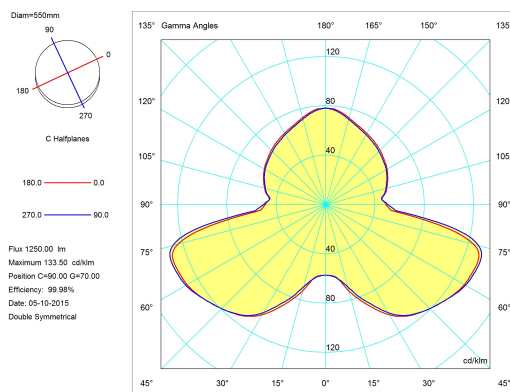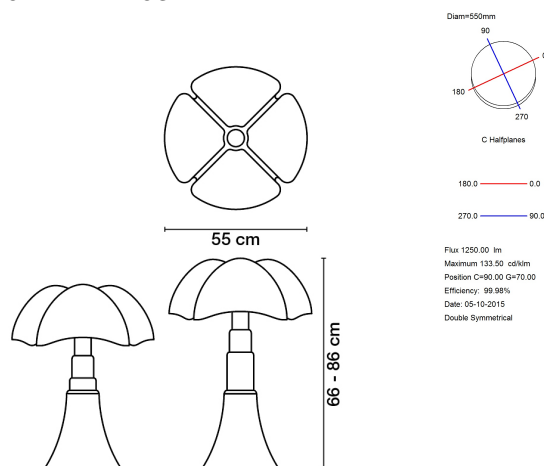

UTILIZATION: **INTERNAL**

TPOLOGY: **TABLE LAMPS**



COLOURS

STRUCTURE:
DIFFUSER:

**DARK BROWN
WHITE**

MATERIALS

STRUCTURE:
DIFFUSER:

**STAINLESS STEEL
OPAL WHITE METHACRYLATE**

MEASURES

WIDTH: -
HEIGHT: **66 - 86 cm**
LENGTH: -
DEPTH: -

DIAMETER: **55 cm**
HOLE DIAMETER: -
HOLE DEPTH: -

WEIGHT NET: **10 KG**
GROSS: **14 KG**

PACKAGING VOL.M³: **54X54X26 - 41X41X78**

NUMBER OF ITEMS: **2**

BULBS

LED 1X14W
FLUX: 1400LM
KELVIN: 2700°
CLASS: A++
CRI: -
COLOR TOLERANCE: -
DURATION: -



DEVICE SPECIFICATIONS

TYPE OF EMISSION: **DIFFUSED**
POWER: **14 W**
FLOW LAMP: **1249 lm**
BEAM ANGLE: -
DEVICE EFFICIENCY: **89.2lm/W**
IMPACT RESISTANCE: -
GLOW WIRE TEST: -

POWER SUPPLY CABLE LENGTH: **45+200cm**
LENGTH OF HANGING CABLE: -
SUPPLY: **INCLUDED**
POWER SUPPLY ASSEMBLY: **EXTERNAL**
TYPE OF DIMMING: **DIMMER ON CABLE**
VOLTAGE: **230 V**

POWER SUPPLY: **ELECTRONIC DIMMABLE POWER SUPPLY**

CERTIFICATIONS



MARKETS

THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES:
EUROPE, USA & CANADA

PIPISTRELLO LED

code: *620/DIM/L/1/MA*

DESIGN **GAE AULENTI** 1965

PHOTO GALLERY



PIPISTRELLO LED



code: **620/DIM/L/1/NE**

DESIGN 1965



TABLE OR STANDING LAMP WITH DIFFUSED LIGHT, ADJUSTABLE HEIGHT WITH TELESCOPIC MOVEMENT. GLAZED STAINLESS STEEL TELESCOPE. WHITE OPAL METHACRYLATE DIFFUSER. BASE AND KNOB: DARK BROWN /MA, WHITE /BI, PURPLE RED /RO, SATIN ALUMINIUM /AL, BRIGHT BLACK /NE - COPPER /CU, GOLD /ORO AND IN TITANIUM /TI COLOURS. LED LIGHT SOURCE INTEGRATED. ELECTRONIC DIMMABLE DRIVER ON THE PLUG.

TECHNICAL DRAWINGS

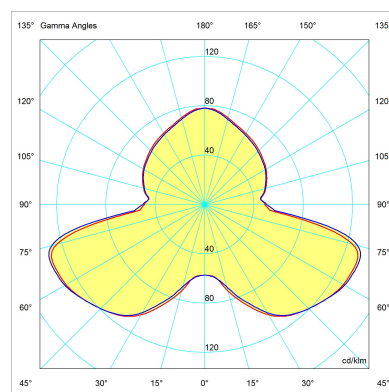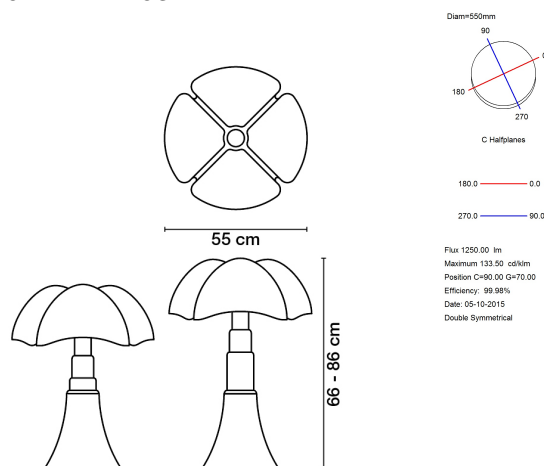

UTILIZATION: **INTERNAL**

TPOLOGY: **TABLE LAMPS**



COLOURS

STRUCTURE:
DIFFUSER:

**BLACK
WHITE**

MATERIALS

STRUCTURE:
DIFFUSER:

**STAINLESS STEEL
OPAL WHITE METHACRYLATE**

MEASURES

WIDTH: -
HEIGHT: **66 - 86 cm**
LENGTH: -
DEPTH: -

DIAMETER: **55 cm**
HOLE DIAMETER: -
HOLE DEPTH: -

WEIGHT NET: **10 KG**
GROSS: **14 KG**

PACKAGING VOL.M³: **54X54X26 - 41X41X78**

NUMBER OF ITEMS: **2**

BULBS

LED 1X14W
FLUX: 1400LM
KELVIN: 2700°
CLASS: A++
CRI: -
COLOR TOLERANCE: -
DURATION: -



DEVICE SPECIFICATIONS

TYPE OF EMISSION: **DIFFUSED**
POWER: **14 W**
FLOW LAMP: **1249 lm**
BEAM ANGLE: -
DEVICE EFFICIENCY: **89.2lm/W**
IMPACT RESISTANCE: -
GLOW WIRE TEST: -

POWER SUPPLY CABLE LENGTH: **45+200cm**
LENGTH OF HANGING CABLE: -
SUPPLY: **INCLUDED**
POWER SUPPLY ASSEMBLY: **EXTERNAL**
TYPE OF DIMMING: **DIMMER ON CABLE**
VOLTAGE: **230 V**

POWER SUPPLY: **ELECTRONIC DIMMABLE POWER SUPPLY**

CERTIFICATIONS



MARKETS

THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES:
EUROPE, USA & CANADA

PIPISTRELLO LED

code: *620/DIM/L/1/NE*

DESIGN 1965

PHOTO GALLERY





PIPISTRELLO LED
code: 620/DIM/L/1/RO

DESIGN GAE AULENTI 1965



TABLE OR STANDING LAMP WITH
DIFFUSED LIGHT, ADJUSTABLE
HEIGHT WITH TELESCOPIC
MOVEMENT. GLAZED STAINLESS
STEEL TELESCOPE. WHITE OPAL
METHACRYLATE DIFFUSER. BASE AND
KNOB: DARK BROWN /MA, WHITE /BI,
PURPLE RED /RO, SATIN ALUMINIUM
/AL, BRIGHT BLACK /NE - COPPER
/CU, GOLD /ORO AND IN TITANIUM /TI
COLOURS. LED LIGHT SOURCE
INTEGRATED. ELECTRONIC DIMMABLE
DRIVER ON THE PLUG.

TECHNICAL DRAWINGS

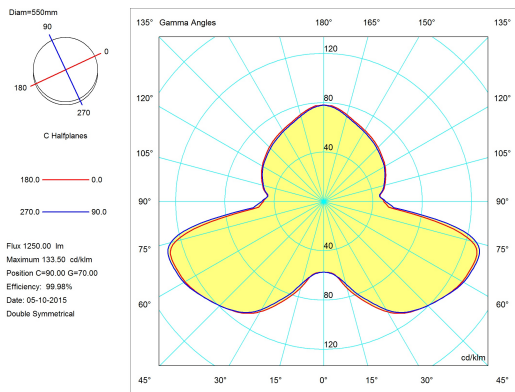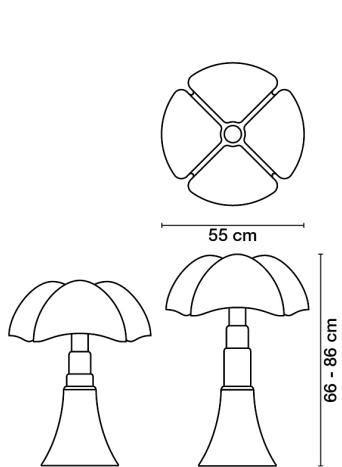

UTILIZATION: INTERNAL

TPOLOGY: TABLE LAMPS



COLOURS

STRUCTURE:
DIFFUSER:

PURPLE RED
WHITE

MATERIALS

STRUCTURE:
DIFFUSER:

STAINLESS STEEL
OPAL WHITE METHACRYLATE

MEASURES

WIDTH: -
HEIGHT: 66 - 86 cm
LENGTH: -
DEPTH: -

DIAMETER: 55 cm
HOLE DIAMETER: -
HOLE DEPTH: -

WEIGHT NET: 10 KG
GROSS: 14 KG

PACKAGING VOL.M³: 54X54X26 - 41X41X78

NUMBER OF ITEMS: 2

BULBS

LED 1X14W
FLUX: 1400LM
KELVIN: 2700°
CLASS: A++
CRI: -
COLOR TOLERANCE: -
DURATION: -



DEVICE SPECIFICATIONS

TYPE OF EMISSION: DIFFUSED
POWER: 14 W
FLOW LAMP: 1249 lm
BEAM ANGLE: -
DEVICE EFFICIENCY: 89.2lm/W
IMPACT RESISTANCE: -
GLOW WIRE TEST: -

POWER SUPPLY CABLE LENGTH: 45+200cm
LENGTH OF HANGING CABLE: -
SUPPLY: INCLUDED
POWER SUPPLY ASSEMBLY: EXTERNAL
TYPE OF DIMMING: DIMMER ON CABLE
VOLTAGE: 230 V

POWER SUPPLY: ELECTRONIC DIMMABLE POWER SUPPLY

CERTIFICATIONS



MARKETS

THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES:
EUROPE, USA & CANADA

PIPISTRELLO LED

code: *620/DIM/L/1/RO*

DESIGN **GAE AULENTI** 1965

PHOTO GALLERY





PIPISTRELLO LED
code: 620/DIM/L/1/TI

DESIGN GAE AULENTI 1965



TABLE OR STANDING LAMP WITH
DIFFUSED LIGHT, ADJUSTABLE
HEIGHT WITH TELESCOPIC
MOVEMENT. GLAZED STAINLESS
STEEL TELESCOPE. WHITE OPAL
METHACRYLATE DIFFUSER. BASE AND
KNOB: DARK BROWN /MA, WHITE /BI,
PURPLE RED /RO, SATIN ALUMINIUM
/AL, BRIGHT BLACK /NE - COPPER
/CU, GOLD /ORO AND IN TITANIUM /TI
COLOURS. LED LIGHT SOURCE
INTEGRATED. ELECTRONIC DIMMABLE
DRIVER ON THE PLUG.

TECHNICAL DRAWINGS

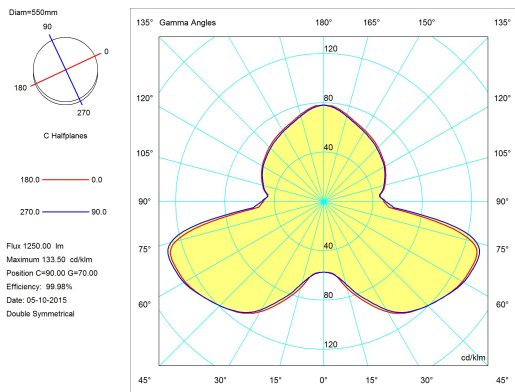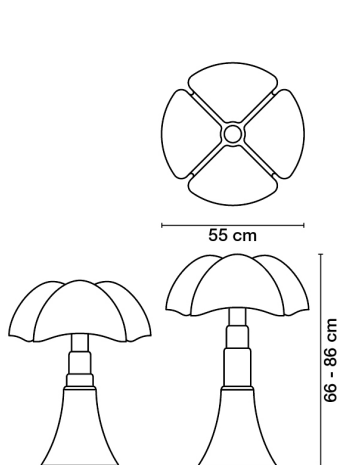

UTILIZATION: **INTERNAL**

TPOLOGY: **TABLE LAMPS**



COLOURS

STRUCTURE:
DIFFUSER:

**TITANIUM
WHITE**

MATERIALS

STRUCTURE:
DIFFUSER:

**STAINLESS STEEL
OPAL WHITE METHACRYLATE**

MEASURES

WIDTH: -
HEIGHT: **66 - 86 cm**
LENGTH: -
DEPTH: -

DIAMETER: **55 cm**
HOLE DIAMETER: -
HOLE DEPTH: -

WEIGHT NET: **10 KG**
GROSS: **14 KG**

PACKAGING VOL.M³: **54X54X26 - 41X41X78**

NUMBER OF ITEMS: **2**

BULBS

LED 1X14W
FLUX: 1400LM
KELVIN: 2700°
CLASS: A++
CRI: -
COLOR TOLERANCE: -
DURATION: -



DEVICE SPECIFICATIONS

TYPE OF EMISSION: **DIFFUSED**
POWER: **14 W**
FLOW LAMP: **1249 lm**
BEAM ANGLE: -
DEVICE EFFICIENCY: **89.2lm/W**
IMPACT RESISTANCE: -
GLOW WIRE TEST: -

POWER SUPPLY CABLE LENGTH: **45+200cm**
LENGTH OF HANGING CABLE: -
SUPPLY: **INCLUDED**
POWER SUPPLY ASSEMBLY: **EXTERNAL**
TYPE OF DIMMING: **DIMMER ON CABLE**
VOLTAGE: **230 V**

POWER SUPPLY: **ELECTRONIC DIMMABLE POWER SUPPLY**

CERTIFICATIONS



MARKETS

THIS ITEM IS AVAILABLE IN THE FOLLOWING COUNTRIES:
EUROPE, USA & CANADA

PIPISTRELLO LED

code: *620/DIM/L/1/TI*

DESIGN **GAE AULENTI** 1965

PHOTO GALLERY

