



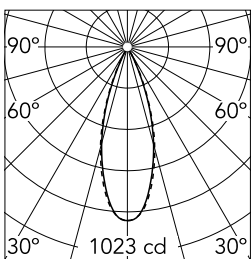

## Decofix Square 2L


Decofix Square 2L

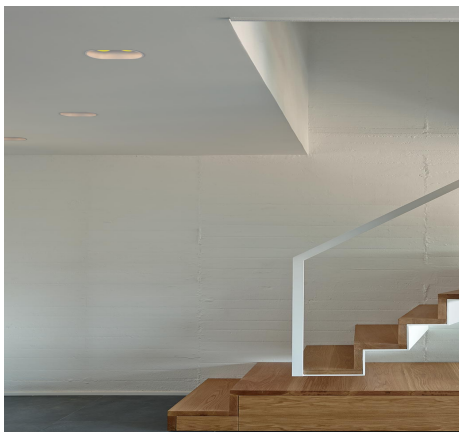

Beam Angle: 35°

h(m)	E(lx)	D(m)
1	1023	0.61
2	256	1.23
3	114	1.84
4	64	2.45
5	41	3.07

Luminous flux luminaire  
397 lm

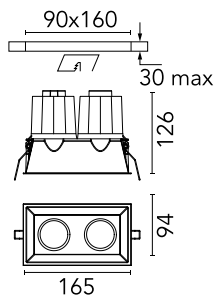

<b>Number of heads</b>	1
<b>Mountings</b>	Ceiling recessed
<b>Lamp category</b>	LED
<b>Colour temperature</b>	3000K
<b>CRI</b>	80
<b>Lumen</b>	1088.68 lm
<b>Environment</b>	Indoor

<b>LED type</b>	LED array
<b>Aiming</b>	Fixed
<b>Light Distribution</b>	Symmetric
<b>Beam Angle</b>	39

<b>Transformer Availability</b>	Separate item
<b>Transformer Mounting</b>	Remote
<b>Transformer Type</b>	Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI

<b>Frequency</b>	50/60
<b>Emergency</b>	Without
<b>Insulation Class</b>	III
<b>Lamp Holder</b>	LED
<b>Dimmable</b>	Yes

<b>Recessed Depth</b>	126
-----------------------	-----

<b>Colors</b>	● 09.3105.14A - Black ● 09.3105.30A - White
---------------	--

<b>Certificates</b>	
---------------------	--

**Note** All versions have

interchangeable screening  
cylinders in 3 colours:  
black, gold or silver,  
incorporated into the light  
fixture.

## Decofix Square 2L



---

Constant Current  
Power Supply for  
LED. 32W  
60.8534



---

Continuous current  
power supply of  
25W  
60.8533